

Part Saker 4349




Utforande: atkomliga delar i 1,5 mm stalplat. Bottenreflektor med sakerhetsskiva i 6mm klar PC. atkomliga skruvar av sakerhetstyp.

Kapslingsklass: IP20.

Montage: Dikt tak.

Anslutning: Kabelinforing i ena gaveln, $\varnothing 19$ mm. Plint 3x2,5 mm².

LED-modul: MacAdams SDCM 3, Ra >80, nominell livslangd L70: 50'000 h, 3000K.

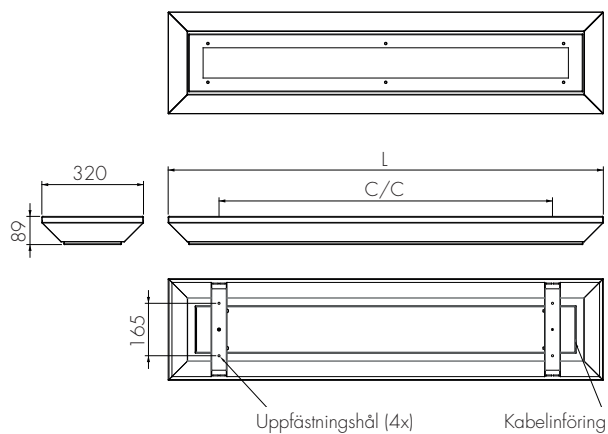

KLAR PC MED BOTTENREFLEKTOR 3000K

Armatur-effekt W	Armaturljus-flode lm	Armaturljus-utbyte lm/W	Art.nr Direktdrift	Art.nr Dim.dig/DALI	Ljuskalla
25	2410	96	4349.326.00	4349.326.20	LED
48	4510	94	4349.349.00	4349.349.20	LED